


# **FY1541S**



## **SPECIFICATIONS**

Model Name	FY1541S
Dial for Adjustment of Alternating Vertical Movement	Yes
Max. Sewing speed	2500s/m
Max. Stitch length	9mm (Forward/Backward)
Needle Bar Stroke	36mm
Lift of Presser Foot	By Hand: 9mm, By Knee: 16mm
Thread Take-up	Slide Type
Amount of Alternating Vertical Movement	2.5~6.5mm
Bottom-Feed Adjusting Mechanism	-Yes
Hook	Horizontal-axis Full-Rotary Double-Capacity Hook
Needle (at the time of delivery)	135 x 17 (Nm160) Nm125~Nm180
Thread	#30~#5, B46~B138, Nm=60/3~ 15/3
Pitch Changing Method	By Dial
Bobbin Thread Winder	Yes
Knee-Lifter Mechanism	Yes
Safety Mechanism	Yes
Lubrication	Centralized Oil Wick Lubrication (Hook: Automatic)
Distance from Needle to Machine Arm	9.9 inches
Bed Size	20.3 inches x 7.1 inches
Automatic Reverse Feed Function	Optional
Motor Output	550w
Weight of the Machine Head	114 lbs

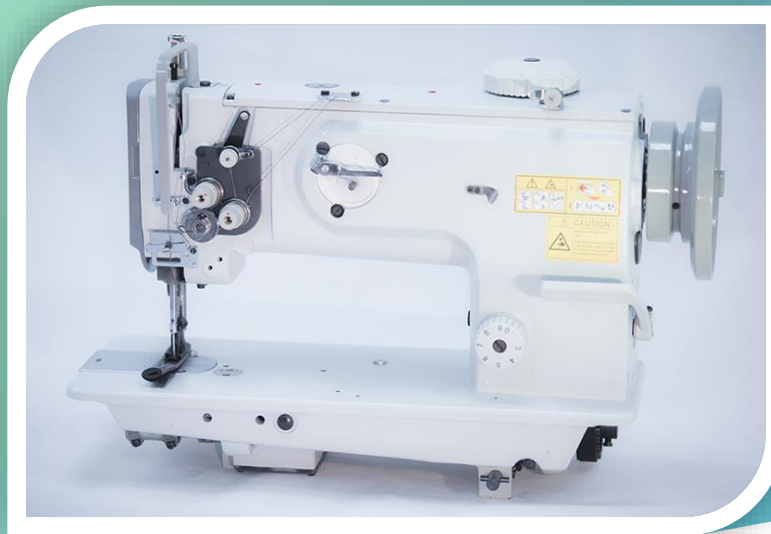

5556 EDISON AVE,

CHINO, CA 91710

(909) 613-1817, FEIYUEUSA.COM